

# Technisches Datenblatt



**Produkt:** 3D90

**Hersteller:** PERMABOND ENGINEERING ADHESIVES

**Warengruppe:** KLEBSTOFF

**Artikelgruppe:** CYANACRYLAT

**Download:** 24.08.2019

**PERMABOND 3D90**

Dieses Datenblatt wurde Ihnen von der Firma tewipack Uhl GmbH zur Verfügung gestellt. Die Firma tewipack Uhl GmbH übernimmt keinerlei Verantwortung für die Aktualität und die Richtigkeit der enthaltenen Informationen. Die Eigenschaften der Produkte können sich aufgrund verschiedener Einflüsse wie beispielsweise Zusammensetzung und Zustand des Substrats, Unreinheiten in oder auf dem Substrat, Temperatur und Luftfeuchtigkeit bei der Lagerung und Umgebungsbedingungen während der Anwendung ändern. Bei Verwendung dieses Produkts in Kombination mit anderem Material ist der Kunde dafür verantwortlich, durch eigene Tests zu prüfen, ob das Produkt für die geplante Kombination geeignet ist und ob diese Kombination die erwarteten Ergebnisse liefert

### Features & Benefits

- 💧 Infiltrant for 3D printing
- 💧 Bonds most 3D powders / granules
- 💧 Low odour for improved worker comfort
- 💧 Non-frosting –good aesthetic appearance
- 💧 Ease of use – no mixing or heat cure
- 💧 100% reactive, no solvents

### Description

**PERMABOND® 3D90** is a low odour, non-fogging, non-frosting alkoxyethyl cyanoacrylate. Permabond 3D90 has been developed for use as an infiltrant for toughening 3D printed parts - its ultra-low viscosity is ideal for wicking into porous surfaces and its delayed cure allows deeper penetration into larger parts. The low odour formulation allows use in large dip baths or for coating large surfaces. Using Permabond 3D90 on printed parts helps strengthen and protect them, as well as fill any voids or porosities and give a smooth, shiny finished appearance.

### Physical Properties of Uncured Adhesive

Chemical composition	Alkoxyethyl cyanoacrylate
Appearance	Colourless
Viscosity @ 25°C	4 mPa.s (cP)
Specific gravity	1.1

### Typical Curing Properties

Fixture / handling time* (0.3 N/mm <sup>2</sup> shear strength is achieved)	10-15 seconds (NBR rubber)
	10-15 seconds (Buna N)
	10-15 seconds (Steel)
	20-30 seconds (PVC)
	20-30 seconds (Phenolic)
20-30 seconds (ABS)	
Full strength	24 hours

\*Handling times can be affected by temperature, humidity and specific surfaces being bonded. Larger gaps or acidic surfaces will also reduce cure speed but this can be overcome by the use of Permabond C Surface Activator (CSA), CSA-NF or Permabond QFS 16. Activators should not be used prior to coating or dipping as this will prevent infiltration.


### Typical Performance of Cured Adhesive

Shear strength* (ISO4587)	Steel	16-20 N/mm <sup>2</sup> (2300-2900 psi)
	Aluminium	8-9 N/mm <sup>2</sup> (1200-1300 psi)
	Zinc	8 N/mm <sup>2</sup> (1200 psi)
	ABS	>6 N/mm <sup>2</sup> (900psi) SF**
	PVC	5 N/mm <sup>2</sup> (700psi)
	PC	>5 N/mm <sup>2</sup> (700 psi) SF**
	Phenolic	4N/mm <sup>2</sup> (600psi)
Impact Strength (ASTM D-950)	3-5 kJ/m <sup>2</sup> (1.4-2.4 ft-lb/in <sup>2</sup> )	
Dielectric Strength (DIN 53481)	25 kV/mm	
Dielectric Constant @ 1MHz (DIN 53483)	3	
Hardness (ISO868)	85 Shore D	
Coefficient of thermal expansion	90 x 10 <sup>-6</sup> mm/mm/°C	
Coefficient of thermal conductivity	0.1 W/(m.K)	

\*Strength results will vary depending on the level of surface preparation and gap.

\*\*SF = Substrate failure

### Hot Strength

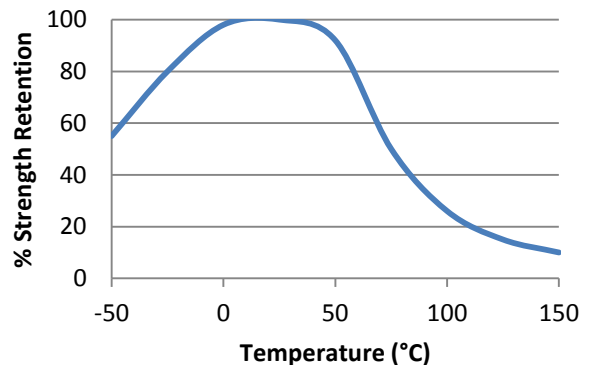


"Hot strength" shear strength tests performed on mild steel. 24hr cure at room temperature and conditioned to pull temperature for 30 minutes before testing.

3D90 can withstand higher temperatures for brief periods (such as for paint baking and wave soldering processes) providing the assembly is not unduly stressed. The minimum temperature the cured adhesive can be exposed to is -55°C (-65°F) depending on the materials being bonded.

The information given and the recommendations made herein are based on our research and are believed to be accurate but no guarantee of their accuracy is made. In every case we urge and recommend that purchasers before using any product in full-scale production make their own tests to determine to their own satisfaction whether the product is of acceptable quality and is suitable for their particular purpose under their own operating conditions. THE PRODUCTS DISCLOSED HEREIN ARE SOLD WITHOUT ANY WARRANTY AS TO MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY OTHER WARRANTY, EXPRESS OR IMPLIED.

No representative of ours has any authority to waive or change the foregoing provisions but, subject to such provisions, our engineers are available to assist purchasers in adapting our products to their needs and to the circumstances prevailing in their business. Nothing contained herein shall be construed to imply the non-existence of any relevant patents or to constitute a permission, inducement or recommendation to practice any invention covered by any patent, without authority from the owner of this patent. We also expect purchasers to use our products in accordance with the guiding principles of the Chemical Manufacturers Association's Responsible Care® program.

## Chemical Resistance

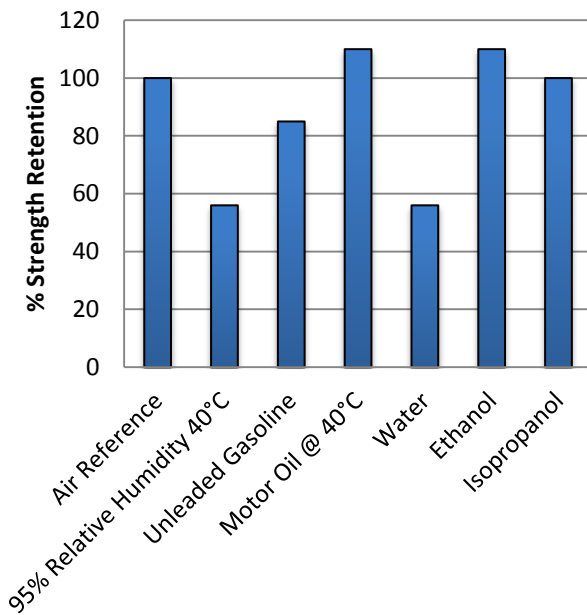

Specimens were immersed for 1000 hours at 22°C (unless otherwise stated)

## Additional Information

This product is not recommended for use in contact with strong oxidizing materials and polar solvents although will withstand a solvent wash without any bond strength deterioration. Users are reminded that all materials, whether innocuous or not, should be handled in accordance with the principles of good industrial hygiene. Full information can be obtained from the Safety Data Sheet.

## Surface Preparation

Surfaces should be clean, dry and grease-free before applying the adhesive.

## Directions for Use

### FOR USE AS 3D PRINTING INFILTRANT

- 1) Coat or dip parts in Permabond 3D90
- 2) Allow adhesive ample time to soak in before removing. Hang parts to dry / drip off over a collection tray. Wet parts will bond to other surfaces they come into contact with so exercise caution.
- 3) Permabond CSA-NF low odour activator can be post-applied to cure liquid adhesive remaining on the surface if required.

### FOR USE AS AN ADHESIVE

- 1) Apply the adhesive sparingly to one surface.
- 2) Bring the components together quickly and correctly aligned.
- 3) Apply sufficient pressure to ensure the adhesive spreads into a thin film.
- 4) Do not disturb or re-align until sufficient strength is achieved, normally in a few seconds.
- 5) Any surplus adhesive can be removed with Permabond CA solvent, nitromethane or acetone.

### NB:

If bonding polypropylene, polyethylene, PTFE or silicone, prime first with Permabond Polyolefin Primer (POP).

## Storage & Handling

Storage Temperature	2 to 7°C (35 to 45°F)
---------------------	-----------------------

Allow adhesive to reach room temperature before opening bottle to prevent condensation inside the bottle which can reduce shelf life.

### Contact Permabond:

- Americas +1 732 868 1372
  - US 800-640-7599
- Asia + 86 21 5773 4913
- Europe +44 (0) 1962 711661
  - UK 0800 975 9800
- Deutschland 0800 111 388
  - France 0805 111 388

[info.americas@permabond.com](mailto:info.americas@permabond.com)

[info.europe@permabond.com](mailto:info.europe@permabond.com)

[info.asia@permabond.com](mailto:info.asia@permabond.com)

The information given and the recommendations made herein are based on our research and are believed to be accurate but no guarantee of their accuracy is made. In every case we urge and recommend that purchasers before using any product in full-scale production make their own tests to determine to their own satisfaction whether the product is of acceptable quality and is suitable for their particular purpose under their own operating conditions. THE PRODUCTS DISCLOSED HEREIN ARE SOLD WITHOUT ANY WARRANTY AS TO MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY OTHER WARRANTY, EXPRESS OR IMPLIED.

No representative of ours has any authority to waive or change the foregoing provisions but, subject to such provisions, our engineers are available to assist purchasers in adapting our products to their needs and to the circumstances prevailing in their business. Nothing contained herein shall be construed to imply the non-existence of any relevant patents or to constitute a permission, inducement or recommendation to practice any invention covered by any patent, without authority from the owner of this patent. We also expect purchasers to use our products in accordance with the guiding principles of the Chemical Manufacturers Association's Responsible Care® program.